

PR-130A / PR-240A

Commercial Mixer-Amplifier

All-in-one mixer-amplifiers for use in all types of commercial applications; restaurants, schools, courtrooms, health clubs, retail stores, coffee shops, medical/dental offices, warehouses and more.



Designed for the most common commercial installation requirements



Ideal for background music, mic, and paging with the ability to connect six external sources



Industry standard connectors to make installs fast and efficient




Front panel controls to easily manage source and master volumes with bass & treble control

KEY SPECIFICATIONS

- 70V/100V/4Ω, 130 or 240 Watts
- 2U Rack-mountable (rack ears included)
- CH 1-4 Balanced Mic/Line inputs on Phoenix Terminals with selectable Phantom Power
- 2 AUX Inputs on RCA connectors.
- (1) TELE-PAGING input, and (1) MOH/LINE OUT on 3-prongs Phoenix terminals with level controls.
- 6-zones with individual level control.
- Optional RM6 - 6-zones paging microphone station
- Power, Signal, -20dB, Clip and Protect Indicators
- Output Current Limiting, Thermal Protection & DC Offset protection

Connection Diagram

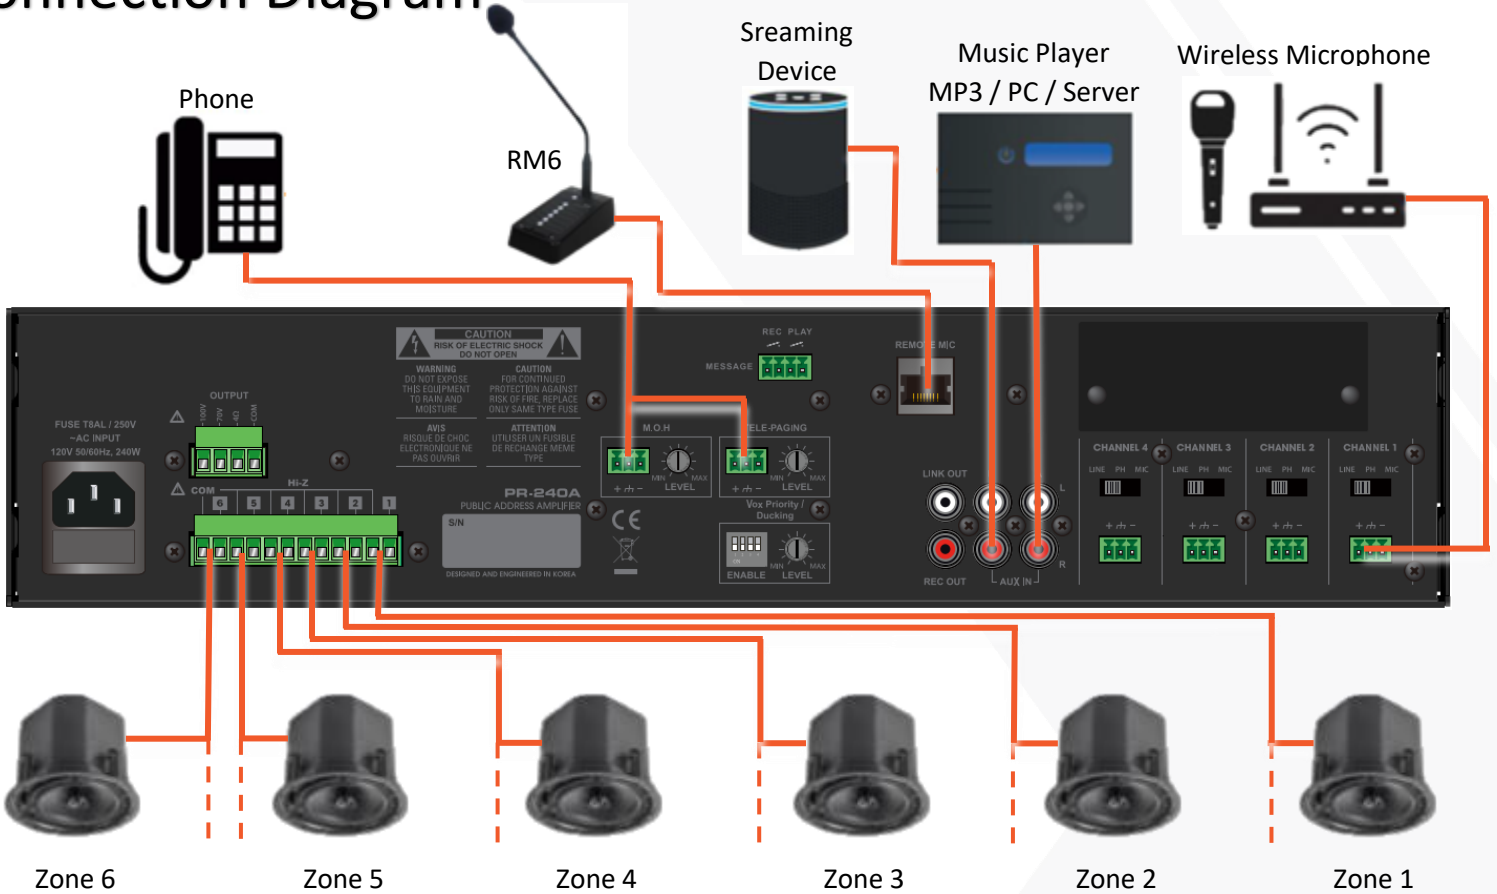

Specifications

| | PR-130A | PR-240A |
|----------------------------------|---|--------------------|
| Total Rated Power Output | 130W | 240W |
| Speaker Output | 4Ω/70V/100V | |
| Input Connectors | CH1-4 : Mic/Line on balanced 3-Conductor Phoenix Connector with Phantom Power AUX : 2 Line input on stereo RCA | |
| Speaker Output Connectors | 6 Zone outputs for Hi-z (70/100V) only, or single output for 4Ω/70V/100V | |
| Frequency Response | 80Hz - 18kHz (±3dB) | |
| Tone Control 100Hz - 10kHz | ±12dB ±3dB | |
| S/N Ratio | < 90 dB | |
| T.H.D (1 kHz) | < 0.5 % | |
| Crosstalk at all control maximum | -70dB at 1kHz | |
| Phantom Power | +48 VDC | |
| Protection | Over current / Over temperature / Under voltage / DC fault | |
| Power Supply | 120V AC, 50-60Hz | |
| Carton Dimensions | 20.7" x 16.5" x 7.6" (525 x 420 x 193mm) | |
| Weight (Net) | 22.05 lbs. (10 kg) | 24.25 lbs. (11 kg) |
| UPC Code | 694970007079 | 694970007093 |