

PR-130BT / PR-240BT

Commercial Mixer-Amplifier

All-in-one mixer-amplifiers for use in all types of commercial applications; restaurants, schools, courtrooms, health clubs, retail stores, coffee shops, medical/dental offices, warehouses and more.



Designed for the most common commercial installation requirements



Ideal for background music, mic, and paging with the ability to connect six external sources



Industry standard connectors to make installs fast and efficient




Front panel controls to easily manage source and master volumes with bass & treble control

KEY SPECIFICATIONS

- 70V/100V/4Ω, 130 or 240 Watts
- 2U Rack-mountable (rack ears included)
- CH 1-4 Balanced Mic/Line inputs on Phoenix Terminals with selectable Phantom Power
- 2 AUX Inputs on RCA connectors.
- (1) TELE-PAGING input, and (1) MOH/LINE OUT on 3-prongs Phoenix terminals with level controls.
- 6-zones with individual level control.
- Built-in media player with Bluetooth, USB/SD MP3 player, FM & Recording
- Optional RM6 - 6-zones paging microphone station
- Power, Signal, -20dB, Clip and Protect Indicators
- Output Current Limiting, Thermal Protection & DC Offset protection

Connection Diagram

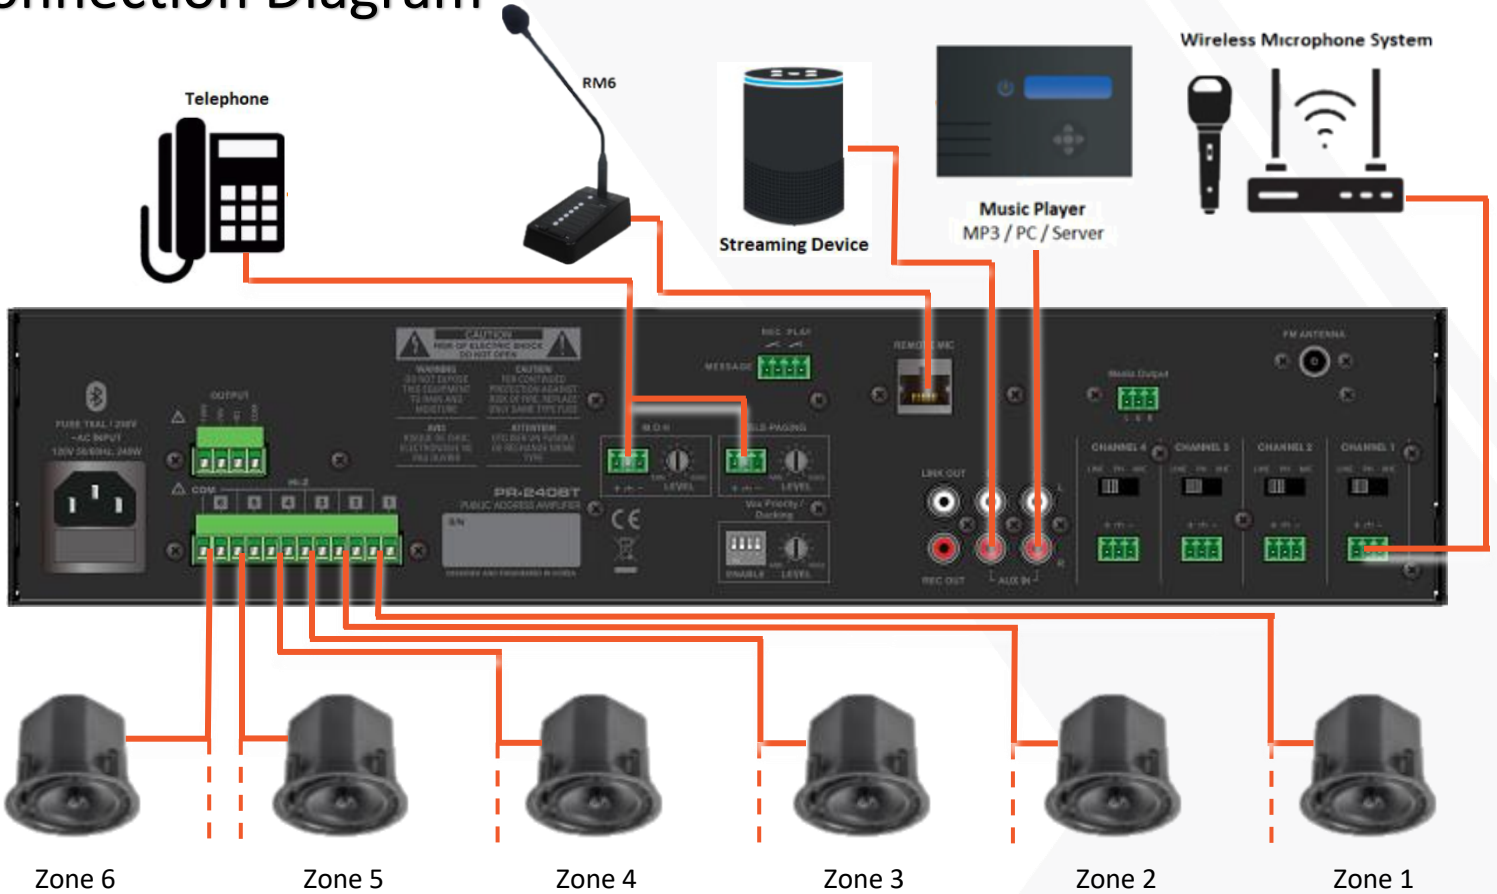

Specifications

	PR-130BT	PR-240BT
Total Rated Power Output	130W	240W
Speaker Output	4Ω/70V/100V	
Input Connectors	CH1-4 : Mic/Line on balanced 3-Conductor Phoenix Connector with Phantom Power AUX : 2 Line input on stereo RCA	
Speaker Output Connectors	6 Zone outputs for Hi-z (70/100V) only, or single output for 4Ω/70V/100V	
Frequency Response	80Hz - 18kHz (±3dB)	
Tone Control 100Hz - 10kHz	±12dB ±3dB	
S/N Ratio	< 90 dB	
T.H.D (1 kHz)	< 0.5 %	
Crosstalk at all control maximum	-70dB at 1kHz	
Phantom Power	+48 VDC	
Protection	Over current / Over temperature / Under voltage / DC fault	
Power Supply	120V AC, 50-60Hz	
Carton Dimensions	20.7" x 16.5" x 7.6" (525 x 420 x 193mm)	
Weight (Net)	22.05 lbs. (10 kg)	24.25 lbs. (11 kg)
UPC Code	694970007086	694970007109