


RM6 6-Zone Gooseneck Paging Microphone


Optional 6-Zones paging microphone with built-in chime for use with PR-130A/BT and PR-240A/BT.

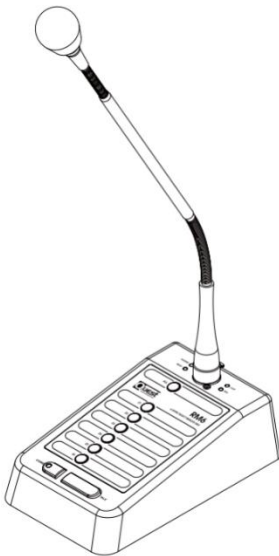

KEY SPECIFICATIONS

- Indicators: Power (Blue), Signal (Green), Clip (Red), Busy (Red)
- XLR microphone input for the included gooseneck microphone
- Individual Zone Selection and ALL zone buttons
- Built-in chime
- Input and output RJ45 jacks for connecting to the PR-Series mixer-amplifier and daisy-linking multiple microphones.
- Up to 4 RM6 microphone station can be interconnected via the link ports

Connection Diagram

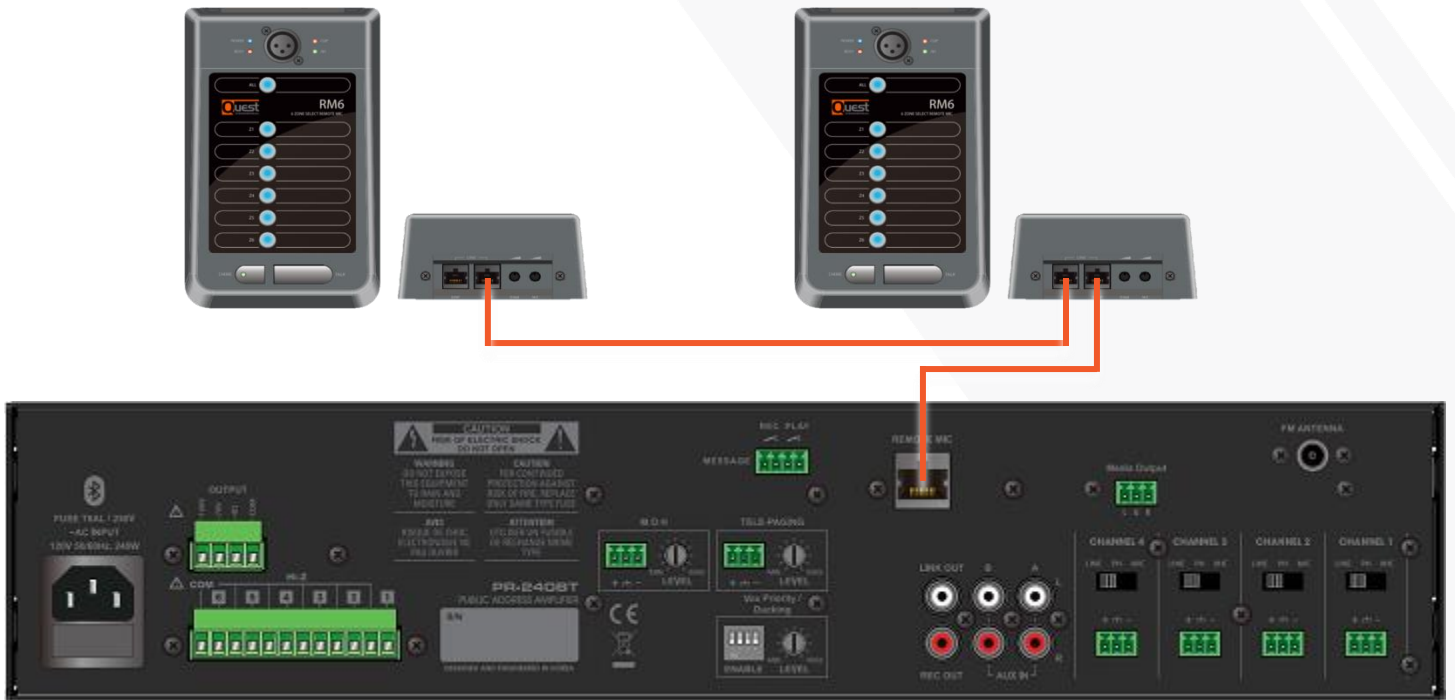

Spécifications

Audio Output	0dB (Balanced)
Audio Input	-36 dB ±3 dB (Balanced)
Frequency Response	80Hz~15kHz (-1 dB)
S/N Ratio	Better than 90dB
Total Harmonic Distortion (T.H.D.)	Less than 0.5%
Serial Interface	RS485 Max 200m (UTP CAT5/6)
Operating Temperature	0° ~ +40°C
Weight (Net)	1.10 lbs. (0.5 kg)
Carton Dimensions (Width/Height/Depth)	7.9(W) x 2.4(H) x 4.7(D) inches 200(W) x 60(H) x 120(D) mm
UPC Code	694970007215